

PRODUCT

DB1800A

DESCRIPTION

ACTIVE SUBWOOFER

SERIES

DB


CATEGORY

PUBLIC ADDRESS


TYPE:

POWERED &
PASSIVE

FRONT PANEL

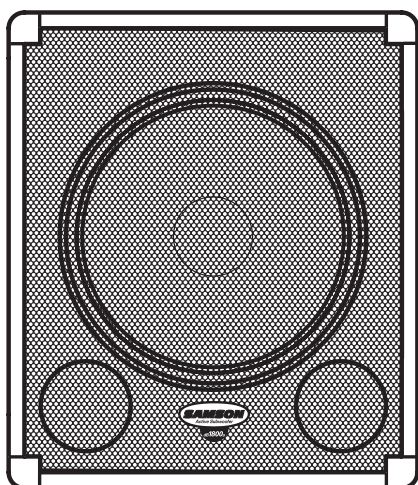

BACK PANEL

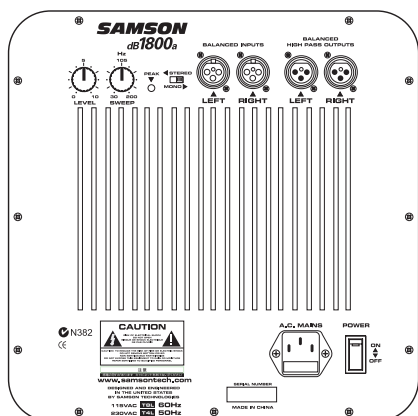**GENERAL DESCRIPTION**

The dB1800a is a self-powered subwoofer featuring an 18" heavy duty driver, complemented by a 500 Watt power amplifier. The dB1800a also offers an active stereo cross-over providing a high-passed output for running your satellite speakers. Solid 3/4 inch plywood construction, steel corners, tough carpet covering and larger casters make the dB1800a a road warrior. In fixed installation systems, the dB1800a provides super tight low frequency output in a relatively small, unobtrusive enclosure. The dB1800a is a perfect add-on to your dB500 and Expedition system, or for any sound reinforcement system where extended low-end is desired. While using your dB1800a, you'll have great low-end anywhere.

FEATURES

- > Heavy-duty, 18 inch Low Frequency Transducer With Butyl Rubber Surround
- > Built-in 500 Watt Power Amplifier
- > Balanced High Pass Outputs for Satellite Speakers
- > Variable Crossover 30 - 200 Hz
- > Stereo / Mono Operation Switch
- > Volume Control
- > Heavy-Duty, Rear Mounted Casters
- > Extra Large Grab Handles
- > 35mm Pole Mount Receptacle
- > Heavy-Duty, Steel Grill
- > 3/4" Plywood Construction, internally braced and covered in tough carpet
- > Three-year extended warranty

ARCHITECT'S & ENGINEER'S SPECIFICATIONS


The DB1800A shall be a wooden subwoofer cabinet to be used as a FOH subwoofer. It shall be black and have metal mesh grills. It shall have a 500 watt class G power amplifier. It shall have a 18 inch woofer for low frequencies. The DB1800A shall have 2 XLR balanced line inputs with level control and frequency sweep control for the crossover. The DB1800A shall have an amplifier clip and protection LED indicator. The DB1800A shall also have a mono/stereo switch. A standard IEC connector and cable will be supplied for connection to AC power sources.

PRODUCT SPECIFICATION SHEET


SERIES DB	DESCRIPTION ACTIVE SUBWOOFER	CATEGORY PUBLIC ADDRESS	DB1800A
---------------------	--	-----------------------------------	----------------

DB1800A SPECIFICATIONS

Transducer	18", Heavy Duty Driver, 4" voice coil, aluminum former
Power Rating	500 Watts RMS 1000 Watts Peak,
Frequency response	20Hz- 200Hz+/-3 dB
Input	Balanced
Connector	XLR - FEMALE
Output	Balanced, high-passed tracking low frequency crossover point
Connector	XLR - MALE
Crossover Frequency	Variable 30Hz – 200Hz
Switch Functions	
Stereo /Mono.....	Selects stereo or mono low frequency operation
Enclosure	
Construction.....	3/4" plywood, carpet covered
Finish	Black carpet
Corners	Steel
Casters	Three Inch, Heavy Duty
Mounting	Integral 1 3/8" (35mm) Pole Mount Receptacle,
Dimensions (H x W x D)	22.5" x 26.81" x 26.18" 570mm x 681 mm x 665mm
Weight	80 lbs. (36.4 kg)



FRONT



SIDE